

## shower valves - Telo Thermostatic Bath Shower Mixer

### Introduction

The popular style of the Telo range ensures that it is at home in whatever setting it is installed. A flagship product of the Inta range, the Telo has proven itself time and time again to be a popular choice.

gives  
**total control**

- Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems
- Thermal cartridge technology
- Temperature stability of  $\pm 2^{\circ}\text{C}$
- Fail safe on hot and cold supplies
- Operating pressure range of 0.2 to 5 bar
- Integrated flow diverter
- Available with deck mounting legs



telo thermostatic bath  
shower mixer with flexible  
slide rail kit  
TL30014CP

telo thermostatic bath  
shower mixer with flexible  
slide rail kit and deck  
mounting legs  
TL30024CP

### Product Range

Description	Code
telo thermostatic bath shower mixer with flexible slide rail kit	TL30014CP
telo thermostatic bath shower mixer with flexible slide rail kit and deck mounting legs	TL30024CP
telo thermostatic bath shower mixer wall mounted	TL30010CP
telo thermostatic bath shower mixer with deck mounting legs	TL30020CP
telo flexible slide rail kit	32665CPA





# shower valves - Telo Thermostatic Bath Shower Mixer

## Features

### Technical Specification

Max Inlet Pressure static	5 Bar
Min Inlet Pressure dynamic	0.2 Bar
Max Inlet Temperature	85°C
Factory Pre-set Temperature	38°C with max temp stop
Inlet Connections	G ¾" F BSP (valve body)
Outlet Connections	G ½" F BSP
Min Temperature to achieve hot or cold failsafe	15°C
System Installation	Unvented, Pressurised, Gravity and Combination Boilers

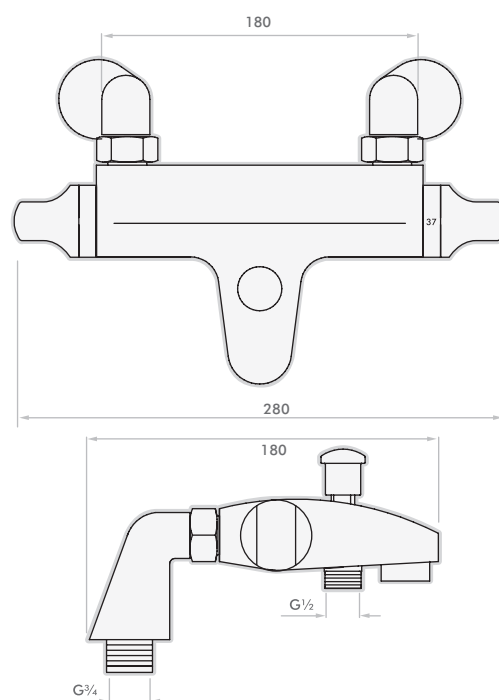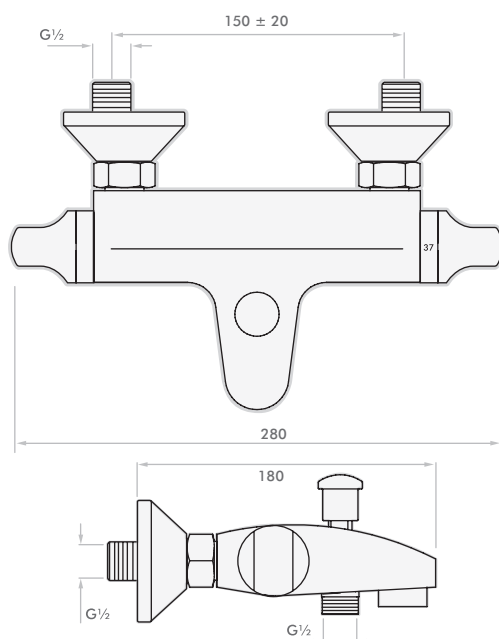

**WRAS**  
APPROVED  
PRODUCT

INSPIRING CONFIDENCE

inta