

shower valves - Telo Thermostatic Concealed Shower

Introduction

The popular style of the Telo range ensures that it is at home in whatever setting it is installed. A flagship product of the Inta range, the Telo has proven itself time and time again to be a popular choice.

**gives
total control**



telo thermostatic concealed shower
with flexible slide rail kit
TL40014CP

- Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems
- Thermal cartridge technology
- Temperature stability of $\pm 2^{\circ}\text{C}$
- Fail safe on hot and cold supplies
- Operating pressure range of 0.2 to 5 bar
- Integrated flow diverter
- Single or dual outlet options

Product Range

Description	Code
telo thermostatic concealed shower with flexible slide rail kit	TL40014CP
telo thermostatic concealed shower	TL40010CP
telo flexible slide rail kit	31665CPA
elbow	T30020CP




shower valves - Telo Thermostatic Concealed Shower

Features

Technical Specification

Max Inlet Pressure static	5 Bar
Min Inlet Pressure dynamic	0.2 Bar
Max Inlet Temperature	85°C
Factory Pre-set Temperature	38°C with max temp stop
Inlet Connections	15mm compression elbows
Outlet Connections	15mm compression
Min Temperature to achieve hot or cold failsafe	15°C
System Installation	Unvented, Pressurised, Gravity and Combination Boilers

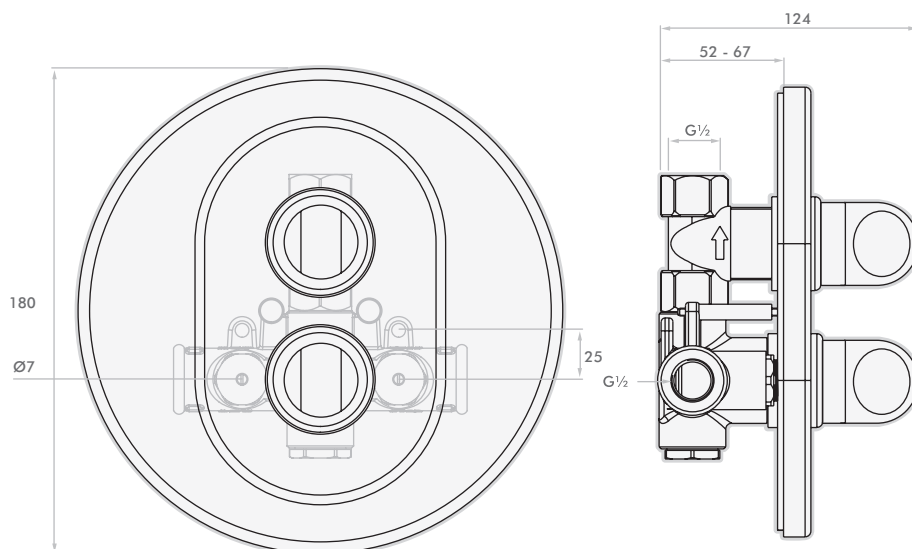

TL40010CP



WRAS
APPROVED
PRODUCT

INSPIRING CONFIDENCE

inta